

Raija Jokinen

Hanging instructions 1

1



Attach the work on the wall with tape.

Use "painters tape", "masking tape" or alike. They do not harm the work and you can move the work easily and find the best place for it.


2

Nail the pins:
 -choose places that are relatively thick, "invisible" and well positioned in terms of even hang (ear joint, under elbow,... please, refer the images on the right)
 -5-7 pins would be fine for a piece


the pin should be about 0,5 cm in the wall

the pin can direct a bit outward from the work

or you can bend it a bit with fingers


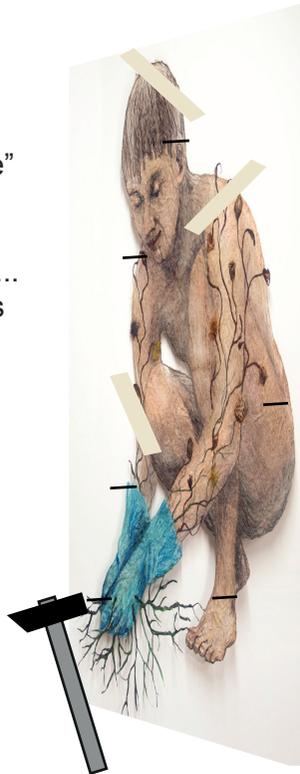


3

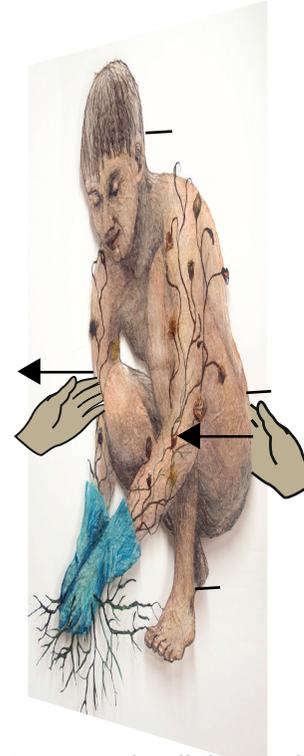

Erase tapes and pull the work out from the wall by placing your fingers carefully between the wall and the work around each pin. Pull little by little outward around each pin.

If there are "hills" or "downs" adjust the pins by bending tips outward (image on the left) or add an extra pin.

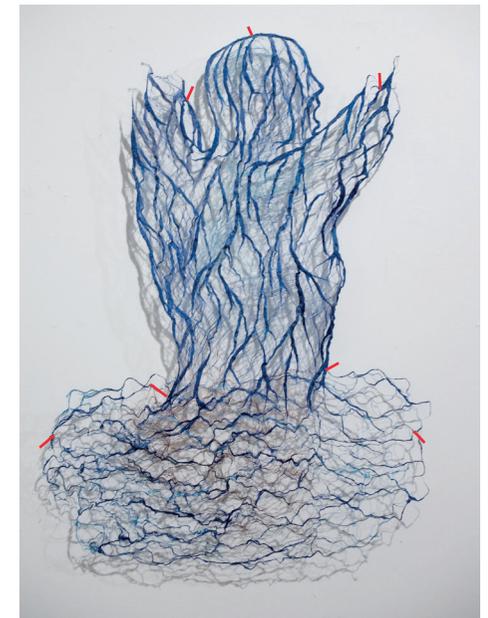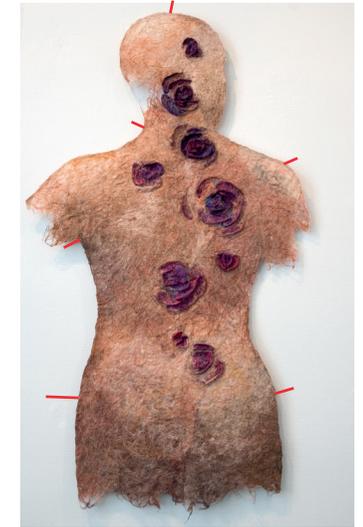

Further information:
 Raija Jokinen
 rajoki@saunalahti.fi
 Whatsapp
 skype: rajoki

Raija Jokinen

Hanging instructions 2

Thin pins are good for wooden or plaster walls.
For harder concrete walls following instructions can be used:

A Use thin concrete wall nails instead of pins.

Please, don't hesitate to contact Raija for pins and hanging buttons or any other concerns with hanging these works of art.

B Use wood pins for creating softer background for pins


Follow the instruction 1 and instead of the pins mark the places for the pins with a tape or pen. Use tape to mark the outline of the work as then it's easier to reposition.

Drill holes for the wooden pins (\varnothing about 3-5mm) and fill the holes with wooden pins and use putty for smoothing and paint for fading the places (mark the spots! with tape!).

Reposition and tape the work on the wall and nail the pins to the wooden pins.

Pull the work outward around each pin (see item 3).

Use this method if you know that the work will remain on the place for a long time.

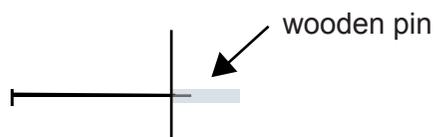

C Using "hanging buttons" with pins

Proceed as in B method but instead of drilling holes, hammer "the hanging buttons" to the spots defined for the pins.

Reposition and tape the work on the wall. Nail the pins to the middle of "the hanging button".

Pull the work outward around each pin (see item 3).

Please, contact Raija for obtaining "hanging buttons" with a hole for the pin.

